

date 08/05/2022

page 1 of 3

MODEL: CPE-220 | DESCRIPTION: PIEZO BUZZER INDICATOR

FEATURES

- wire leads with panel-mount tabs
- 12 Vdc rating
- 2.7 kHz rated frequency
- · low-profile






SPECIFICATIONS

tion	min	typ	max	units
		12		Vdc
	3		20	Vdc
			10	mA
	2,200	2,700	3,200	Hz
age	76			dB
				mm
			5.0	g
High Heat (black)				
	-30		85	°C
	-40		95	°C
	age High Heat (black)	2,200 age 76 High Heat (black)	12 3 3 2,200 2,700 age 76 High Heat (black) -30	12 3 20 10 10 2,200 2,700 3,200 age 76 5.0 High Heat (black) -30 85

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106kPa pressure, unless otherwise noted.


MECHANICAL DRAWING

units: mm tolerance: ±0.5 mm

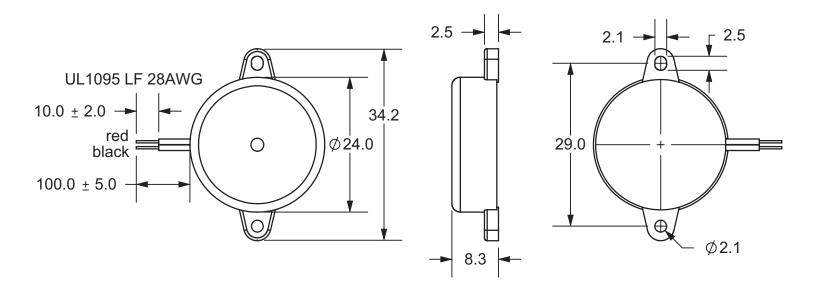

PERFORMANCE CURVES

P: Voltage vs. Sound Pressure Level I: Voltage vs. Current Consumption

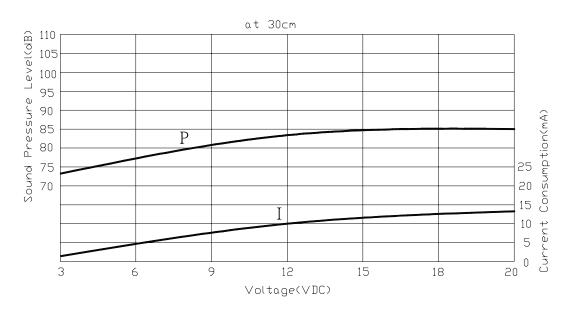

REVISION HISTORY

rev.	description	date	
1.0	initial release	11/12/2007	
1.01	applied new spec template	06/18/2015	
1.02	brand update	11/15/2019	
1.03	logo, datasheet style update	08/05/2022	

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.