MODEL: CPE-270 | **DESCRIPTION:** PIEZO BUZZER INDICATOR

FEATURES

• wire leads with panel-mount tabs
• 12 Vdc rating
• 3.5 kHz rated frequency

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		3		28	Vdc
current consumption	at rated voltage			5	mA
rated frequency		3,000	3,500	4,000	Hz
sound pressure level	at 30 cm, rated voltage	86			dB
dimensions	Ø33.7 x 14.5				mm
weight				7.0	g
material	ABS UL94 1/16" HB High Heat (black)				
terminal	wire leads				
operating temperature		-30		85	°C
storage temperature		-40		95	°C
RoHS	yes				

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106kPa pressure, unless otherwise noted.
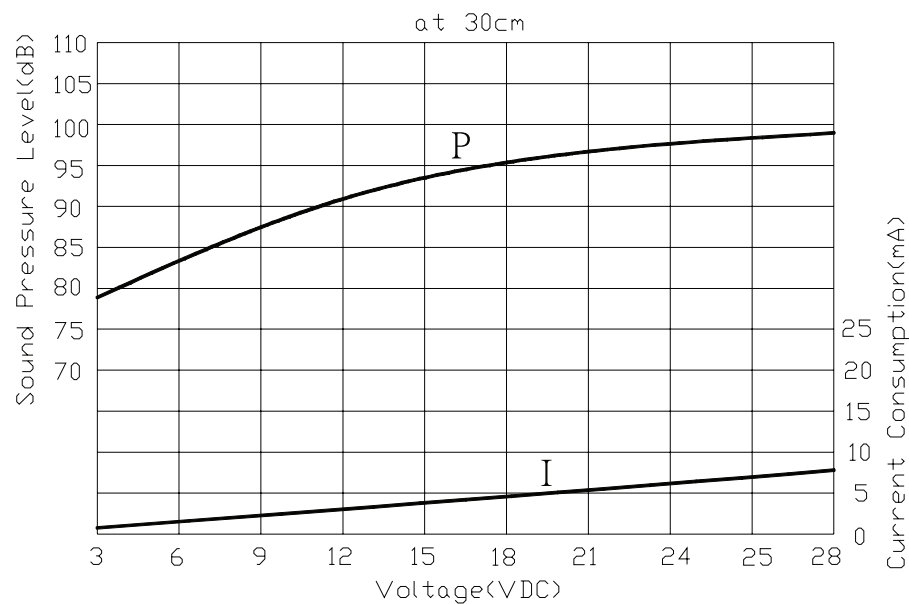
MECHANICAL DRAWING

units: mm
tolerance: ±0.5 mm

UL1095 LF 28AWG
5.0 ± 2.0
black
red
140.0 ± 5.0
55.0
⌀33.7
4.5
14.5
⌀3.0 (2 PLCS)
45.0
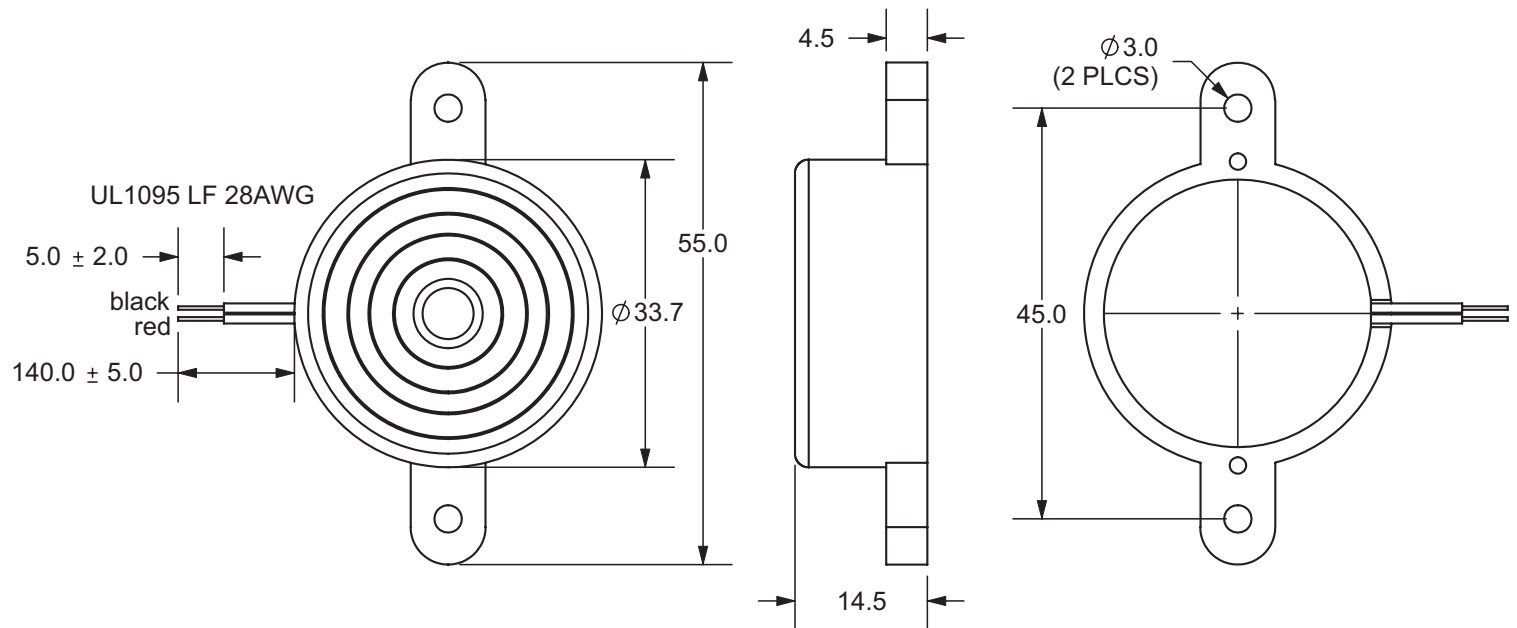
PERFORMANCE CURVES

P: Voltage vs. Sound Pressure Level
I: Voltage vs. Current Consumption

at 30cm

Sound Pressure Level(dB)
Current Consumption(mA)
Voltage(VDC)

REVISION HISTORY

rev.	description	date
1.0	initial release	11/12/2007
1.01	applied new spec template	06/16/2015
1.02	brand update	11/15/2019
1.03	logo, datasheet style update	08/05/2022

The revision history provided is for informational purposes only and is believed to be accurate.